


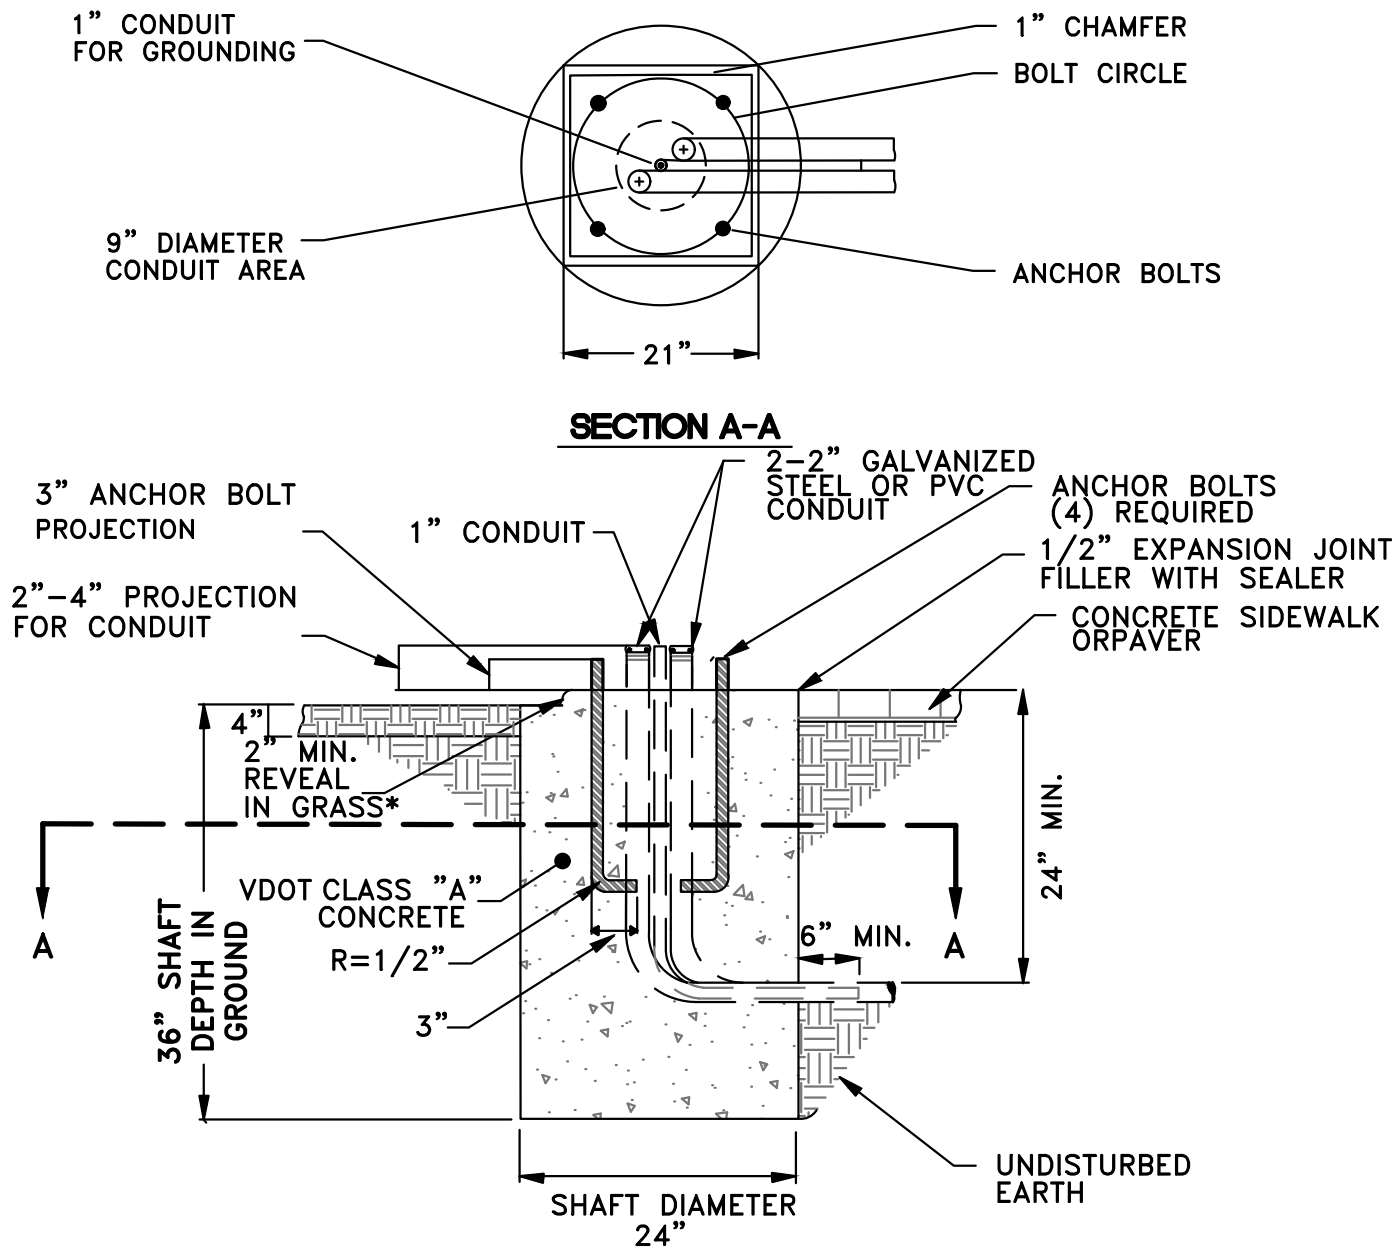

NOTES:

1. FOUNDATION TOP SHALL BE FINISHED AND LEVEL.
2. ANCHOR BOLTS SHALL BE 3/4"X18".
3. BOLT PATTERN SHALL BE PARALLEL TO THE CURB.
4. ALL CONDUIT RADII ARE 90 (R) 24" SWEEPS.
5. THIS DETAIL DOES NOT APPLY TO CARLYLE STREETLIGHT POLES.
6. REVEAL IS FLUSH IN SIDEWALK/CONCRETE.*

PEDESTAL POLE FOUNDATION

1 04/24

REVISION & DATE



ARLINGTON COUNTY, VIRGINIA
DEPARTMENT OF ENVIRONMENTAL SERVICES

DRAWING NO.
66-03
FORMERLY TS4-3