


**NOTES**

1. AT PLANTING PRUNE ONLY CROSSING LIMBS, BROKEN OR DEAD BRANCHES, AND ANY BRANCHES THAT POSE A HAZARD TO PEDESTRIANS PER ANSI STANDARD A300. DO NOT PRUNE INTO OLD WOOD ON EVERGREENS.
2. CONTRACTOR SHALL MAXIMIZE EXCAVATED AREA FOR TREE PIT WITHOUT ADVERSELY IMPACTING ADJACENT SITE FEATURES.
3. UNLESS OTHERWISE DIRECTED BY ARLINGTON COUNTY URBAN FORESTER, BACKFILL SOIL MIXTURE WILL BE 3/4 EXISTING SOIL CLEANED OF DEBRIS (GRAVEL, ROCKS, STICKS, TRASH, ETC.) AND MIXED WITH 1/4 ORGANIC MATERIAL (COMPOSTED BARK, LEAF MOLD, OR OTHER PLANT DEBRIS PROCESSED TO A POINT OF DECAY AND APPROVED BY THE URBAN FORESTER; PEAT MOSS SHALL NOT BE USED).
4. TREES PLANTED WITHOUT THE TRUNK FLARE VISIBLE WILL BE REJECTED.
5. TREES MAY ONLY BE STAKED IF REQUIRED BY THE COUNTY URBAN FORESTER. REFER TO STAKING DETAILS.
6. ALL PLANTS MUST BE WATERED TWICE: ONCE AT INSTALLATION AND AGAIN WITHIN 48-HOURS OF INSTALLATION, PER THE SPECIFICATIONS.

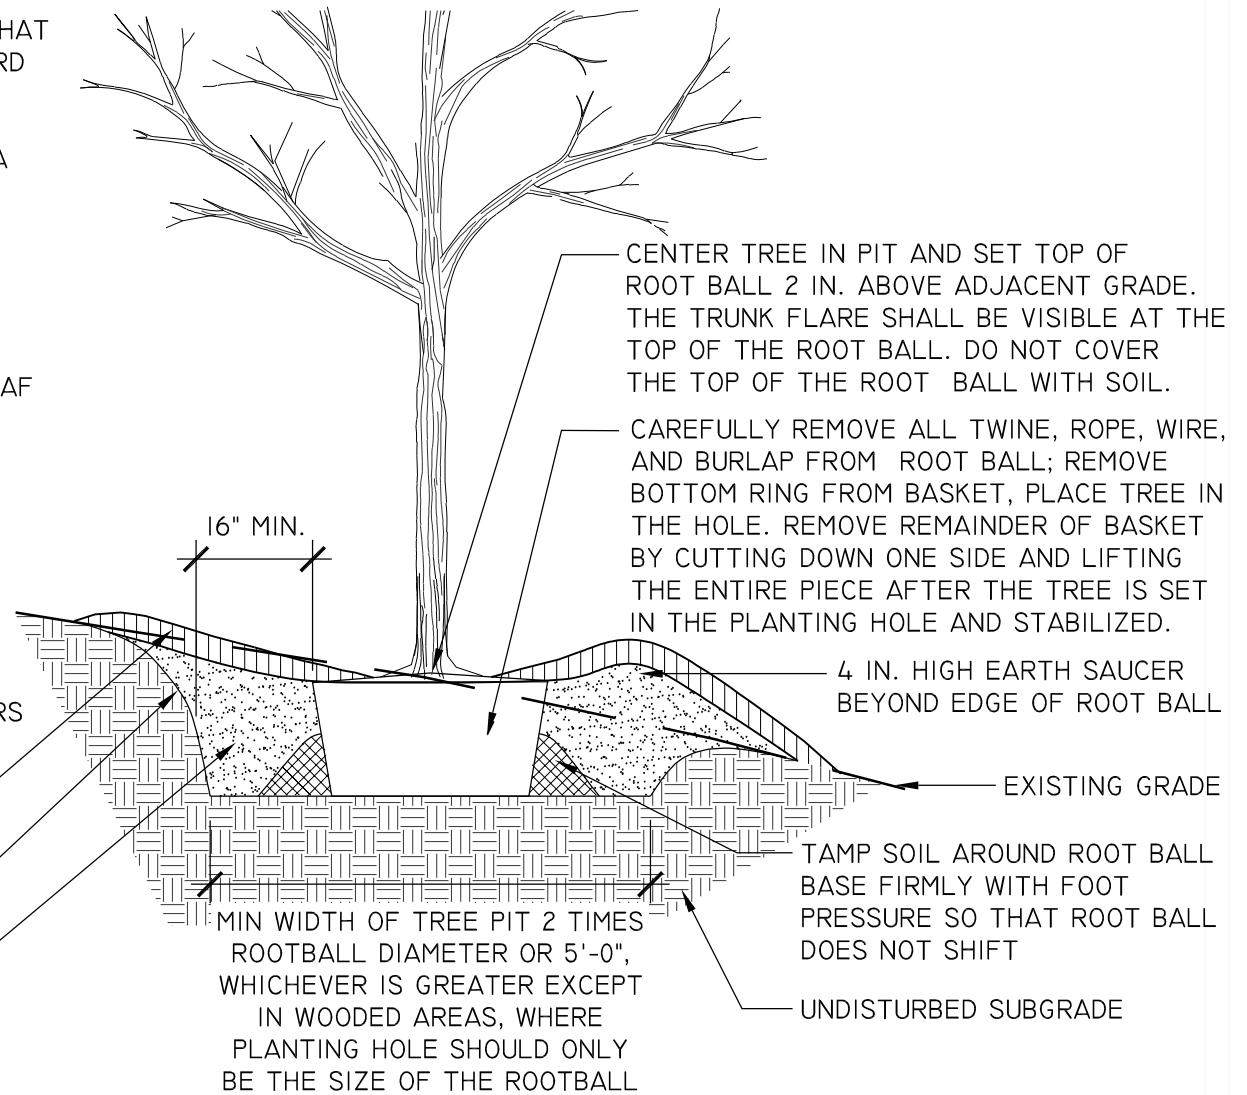

3 IN. SHREDDED HARDWOOD BARK MULCH; MULCH MUST BE 6" AWAY FROM TREE TRUNK


ROUGHEN SIDES OF PLANTING HOLE

BACKFILL SOIL MIXTURE FOR ENTIRE TREE PIT AREA X ROOTBALL DEPTH

MIN WIDTH OF TREE PIT 2 TIMES ROOTBALL DIAMETER OR 5'-0", WHICHEVER IS GREATER EXCEPT IN WOODED AREAS, WHERE PLANTING HOLE SHOULD ONLY BE THE SIZE OF THE ROOTBALL

TAMP SOIL AROUND ROOT BALL BASE FIRMLY WITH FOOT PRESSURE SO THAT ROOT BALL DOES NOT SHIFT

UNDISTURBED SUBGRADE



**TREE PLANTING ON SLOPE**

SECTION  
329300.2 (2026)

1/2" = 1'-0"

