





SIGN ENLARGEMENT  
2" = 1'-0"

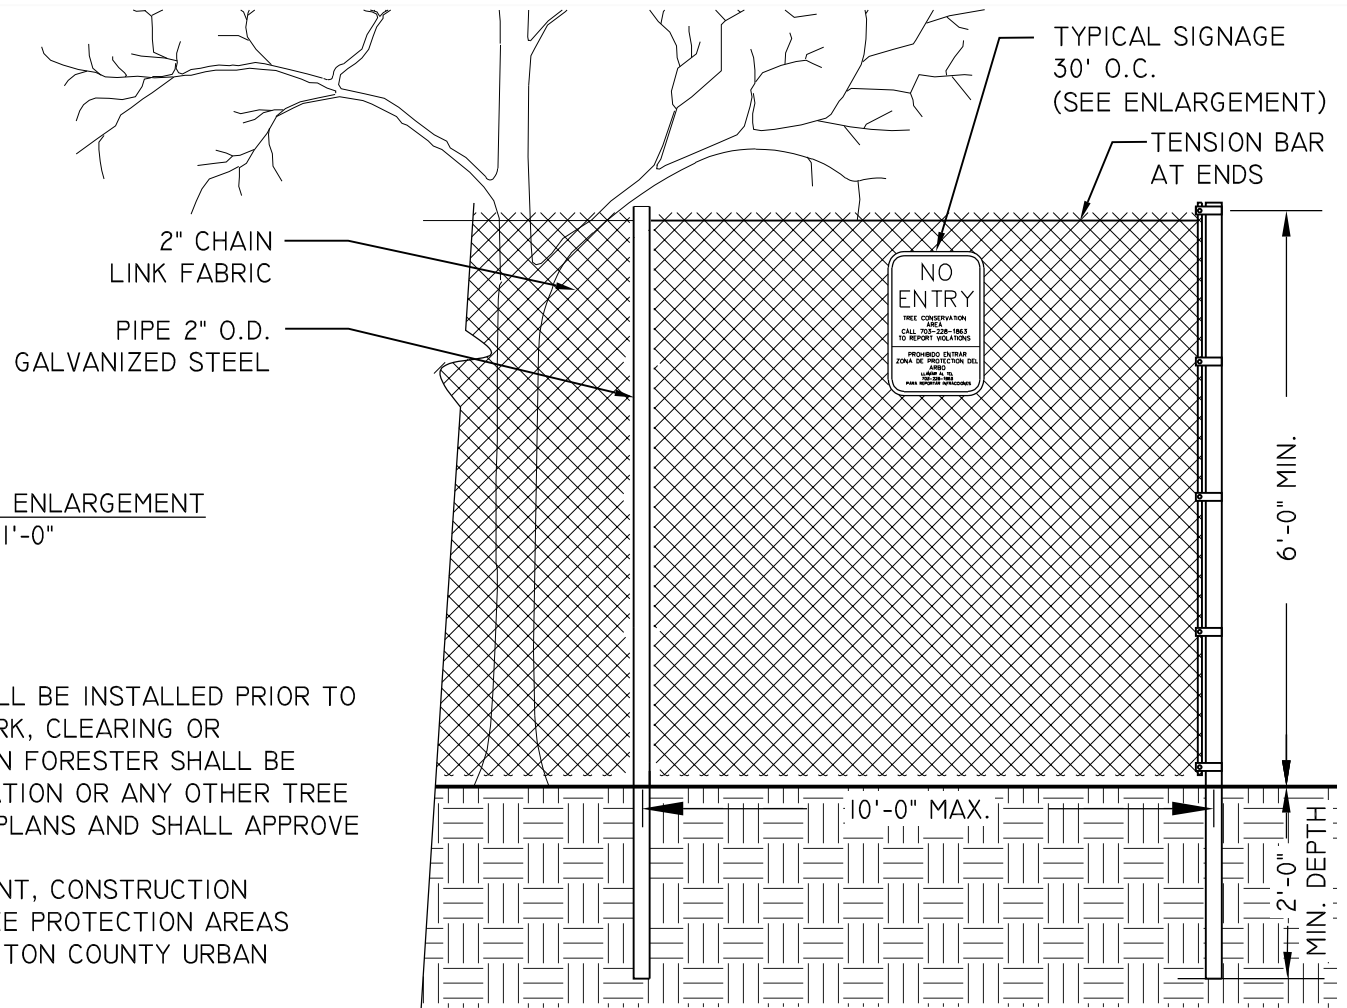

**NOTES:**

1. TREE PROTECTION FENCE (TPF) SHALL BE INSTALLED PRIOR TO ANY DISTURBANCE, INCLUDING SITE WORK, CLEARING OR DEMOLITION. ARLINGTON COUNTY URBAN FORESTER SHALL BE NOTIFIED 72 HOURS PRIOR TO INSTALLATION OR ANY OTHER TREE PRESERVATION MEASURE SPECIFIED IN PLANS AND SHALL APPROVE LAYOUT.
2. NO PERSONNEL, VEHICLES, EQUIPMENT, CONSTRUCTION MATERIALS OR DEBRIS ALLOWED IN TREE PROTECTION AREAS WITHOUT WRITTEN CONSENT OF ARLINGTON COUNTY URBAN FORESTER.
3. REMOVE TPF ONLY WITH APPROVAL FROM ARLINGTON COUNTY URBAN FORESTER AFTER ALL SITE WORK HAS BEEN COMPLETED.
4. SIGN MATERIAL TO BE WEATHER RESISTANT.
5. DO NOT USE THIS DETAIL FOR RESTRICTED SPACES, SUCH AS TREE PITS. REFER TO 311300.8 - WOODEN TREE GUARD, INSTEAD.



**6' CHAIN LINK TREE PROTECTION FENCE**

ELEVATION  
311300.1 (2026)

1/2" = 1'-0"

