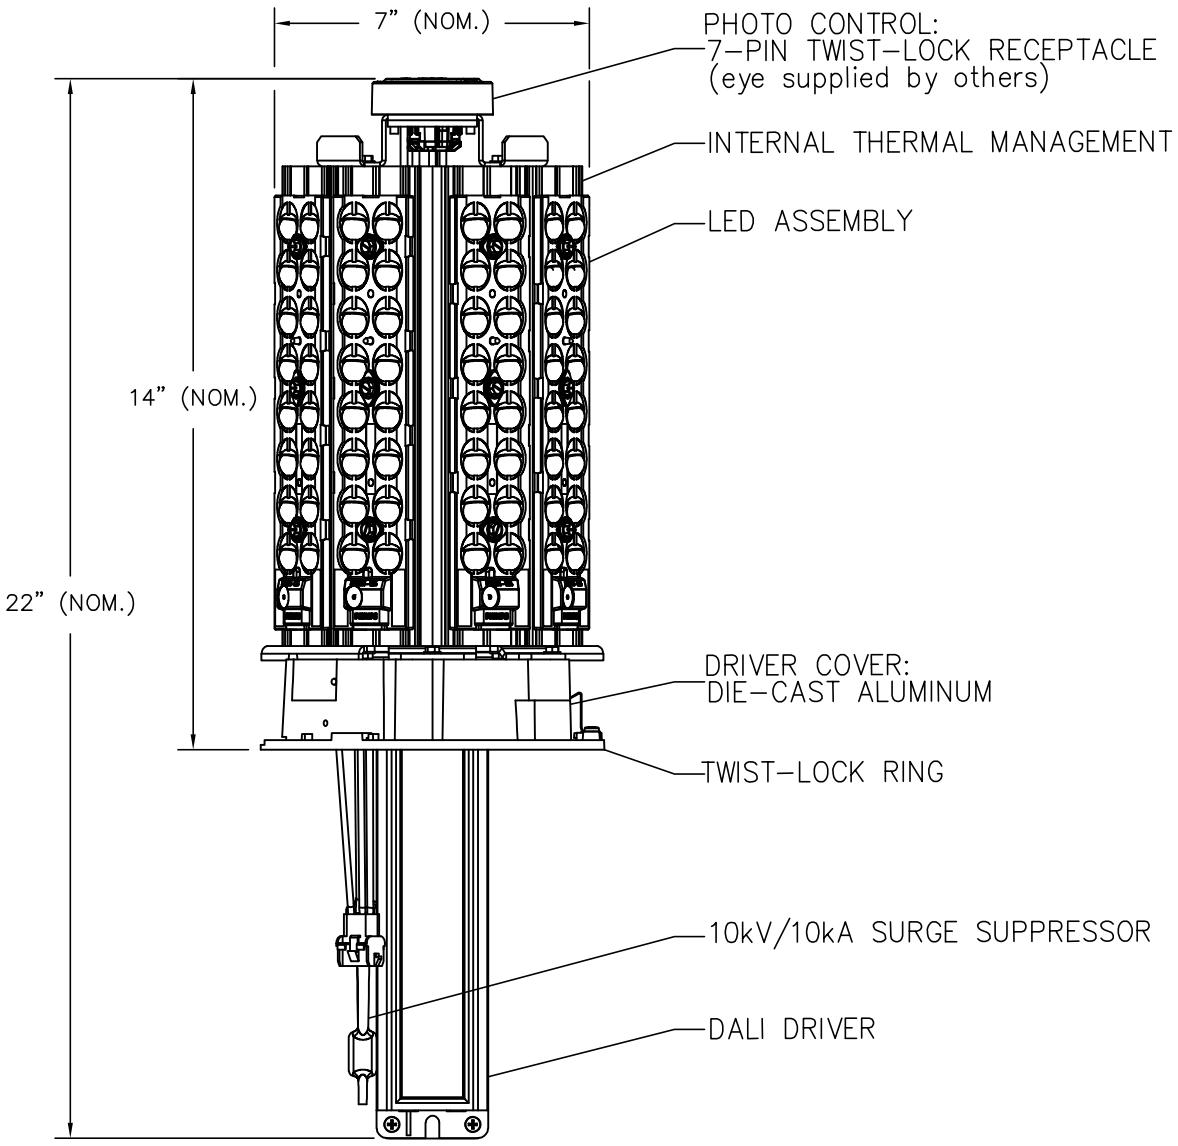

NOTES:

1. UNIT SHALL BE TESTED FOR VIBRATION AND SHOCK RESISTANCE.
2. POWER SUPPLY (DRIVER) SHALL OPERATE OVER VOLTAGES RANGING FROM 120-277 VOLTS.
3. DRIVERS SHALL HAVE VOLTAGE SURGE PROTECTION TO WITHSTAND HIGH REPETITION NOISE TRANSIENTS.
4. DURING REMOVAL THE CONTRACTOR SHALL MAKE A DETAILED NOTE OF WHICH POLE (INCLUDING THE POLE NUMBER) THAT THE LUMINAIRE WAS REMOVED FROM.

DECORATIVE POST-TOP LED ENGINE

REVISION	& DATE

ARLINGTON VIRGINIA

ARLINGTON COUNTY, VIRGINIA
DEPARTMENT OF ENVIRONMENTAL SERVICES

DRAWING NO.
14110-02